

<b>Calendar &amp; Tasks</b> .....	<b>9-2</b>
Calendar .....	9-2
Tasks .....	9-5
<b>Alarms</b> .....	<b>9-7</b>
Using Alarms .....	9-7
<b>Wakeup TV</b> .....	<b>9-9</b>
Using Wakeup TV .....	9-9
<b>Calculator</b> .....	<b>9-11</b>
Using Calculator .....	9-11
<b>Expenses Memo</b> .....	<b>9-12</b>
Adding Expenses .....	9-12
<b>Osaifu-Keitai®</b> .....	<b>9-13</b>
Osaifu-Keitai® (Japanese) .....	9-13
Locking IC Card .....	9-14
<b>Simulated Call</b> .....	<b>9-17</b>
Faking Incoming Calls .....	9-17
<b>Stopwatch</b> .....	<b>9-18</b>
Using Stopwatch .....	9-18
<b>Countdown Timer</b> .....	<b>9-19</b>
Using Countdown Timer .....	9-19
<b>World Clock</b> .....	<b>9-20</b>
Opening World Clock .....	9-20

<b>Hour Minder</b> .....	<b>9-21</b>
Using Hour Minder .....	9-21
<b>Document Viewer</b> .....	<b>9-22</b>
Opening PC Documents .....	9-22
<b>Notepad</b> .....	<b>9-23</b>
Saving Text .....	9-23
<b>ASCII Art</b> .....	<b>9-24</b>
Using ASCII Art .....	9-24
<b>Voice Recorder</b> .....	<b>9-25</b>
Recording/Playing Voice .....	9-25
<b>Scan Barcode</b> .....	<b>9-26</b>
Scanning Barcodes .....	9-26
<b>Create QR Code</b> .....	<b>9-27</b>
Creating QR Codes .....	9-27
<b>Scan Card</b> .....	<b>9-28</b>
Scanning Business Cards .....	9-28
<b>Text Scanner</b> .....	<b>9-29</b>
Scanning Text .....	9-29
<b>Additional Functions</b> .....	<b>9-30</b>
<b>Troubleshooting</b> .....	<b>9-42</b>

# 9

## Handy Extras

# Calendar

## Opening Calendar

- 1 ➔ **Tools** ➔ ➔ **In PIM/Lifestyle menu, Calendar** ➔



Calendar Window

## Opening Help

[Calendar Window]

## Toggling View

Press repeatedly to toggle Calendar window.



Month View



2Month View



Week View

## Key Assignments

### All Views

	Open previous page
	Open next page
	Go to the current date
	Open Help

### Month/2Month View

	Select date
--	-------------

### Week View

	Select date
	Select time block

## Advanced

- Changing default view Jumping to specified date Changing date color Selecting task view option Adding stamps (Month View) Hiding schedules Saving additional holidays Removing/restoring preset holidays (P.9-30)

## Saving Schedules


Follow these steps to save subject, start/end date/time, Alarm and schedule details. Either Subject or Description must be saved per entry.

- 1** In Calendar window, select date →




- 2** <Add New Entry> →

- 3** Enter subject →



- 4** Enter start date/time →



- 5** End: → → Enter end date/time →

- 6** Alarm: →

- 7** Alarm Time: → → Select time → →

- 8** Description: → → Enter schedule details →

- 9** → Saved

### All-Day Schedule

In , → → From

### Custom Alarm Time

In , Alarm Time: → → Other →

→ Enter date/time → → →

From

## At Alarm Time

Alarm activates; sounds/vibrates by related settings.



### Stopping Alarm to Return to Standby

- While Alarm sounds/vibrates, press , or .

### Stopping Alarm to Open Schedule

- While Alarm sounds/vibrates, press a key other than , or .

### When Another Function is Active

- Alarm may not activate until handset returns to Standby.

### Incoming Calls


- Active Alarm stops for incoming calls. Information window opens after handset returns to Standby.

## Advanced

- Setting Category/Location
- Saving repetitive schedules
- Editing entries
- Changing Alarm tone/video & duration
- Changing Alarm volume
- Selecting Vibration option (And more on P.9-30 - 9-31)

## Opening Schedules/Tasks

- 1 In Calendar window, select date →



Schedule List

- 2 Select schedule or task →
- 3 → Standby returns

## Opening Task List

In , select task → → Go to Tasks →

## Accessing Secret Entries

[Calendar Window] → Unlock Temporarily → → Enter Handset Code →

## Opening Related Message

Open schedule-related messages saved from Messaging message list.

- 1 In schedule list, select schedule →
- 2 → Related Mail →
  - Related message opens.
  - To return to schedule window, press .

## Deleting Message from Schedule

After 1, → Related Mail: → → Yes → →

## Deleting Schedules

## One Entry

- 1 In schedule list, select schedule →
  - 2 Delete →
  - 3 This Appointment → → Yes →
- All Entries of the Day
- 1 In Calendar window, select date →
  - 2 Delete → → All This Day → → Yes →

## Advanced


- 1 Searching entries Checking memory status Deleting all entries Deleting entries by specifying week (Week View) Deleting entries by specifying month (Month View) Deleting entries in two months (2Month View) (P.9-31 - 9-32)

# Tasks

## Saving Tasks


Follow these steps to save subject, due date/time, Alarm and task details:  
Either Subject or Description must be saved per entry.

- 1



- 2


- 3



- 4



- 5



- 6

- 7

- 8

### Task with No Due Date/Time

In

### Custom Alarm Time

In ,

## Advanced

- Hiding tasks
- Editing tasks
- Setting priority
- Changing Alarm tone/video & duration
- Changing Alarm volume
- Selecting Vibration option
- Sounding Alarm tone even in Manner mode (P.9-32)

## At Alarm Time

Alarm activates; sounds/vibrates by related settings.



## Stopping Alarm to Return to Standby

- While Alarm sounds/vibrates, press or .

## Stopping Alarm to Open Task

- While Alarm sounds/vibrates, press a key other than , , or .

## When Another Function is Active


- Alarm may not activate until handset returns to Standby.

## Incoming Calls

- Active Alarm stops for incoming calls. Information window opens after handset returns to Standby.

## Opening Tasks


- ➔ **Tools** ➔ ➔ **In PIM/ Lifestyle menu, Tasks** ➔



Task List

- Use to open completed or uncompleted task list.

- Select task ➔



- ➔ **Standby returns**

## Accessing Secret Entries

- After
  -, ➔ **Unlock Temporarily** ➔ ➔ **Enter Handset Code** ➔

## Marking Tasks as Completed

- After
  -, select task ➔

## Deleting Tasks

## One Entry

- In task list, select task ➔

- Delete** ➔

- This Task** ➔ ➔ **Yes** ➔

## All Completed Tasks

- In task list,

- Delete** ➔ ➔ **All Comp. Tasks** ➔ ➔ **Yes** ➔

## Advanced

- Searching tasks
- Sorting tasks by priority
- Checking memory status
- Deleting all tasks (P.9-33)


## Using Alarms

### Setting Alarm

Follow these steps to set Alarm to sound at a specific time on a specific day of the week:

Set Snooze (Alarm repeats at set interval), Alarm Volume and Duration.

- 1 **Alarms**



Alarm List


- 2 --:-- **Enter hour (24-hour format)** **Enter minutes**



- 3 **Repeat:**



- 4 **Selected Days**



- 5 **Select day** (/✓)

- 6 **Snooze:**

- 7 **Select interval**   
 • For custom intervals, select *Other*.

- 8 **Alarm Volume:**

- 9 **Adjust level**

- 10 **Duration:**

- 11 **Select time**   
 • For custom Duration, select *Other*.

- 12 **Saved**   
 • For more settings, repeat 2 - 12.

- 13 **Alarm setting ends**

#### Activating Alarm Once or Daily

In 4, *Once or Every Day (All)*

#### Selecting/Canceling All Days

In 5,

#### Excluding Holidays

In 5, select day (/✓)   
 **Complete selection**

### Advanced

- Editing entries Saving entry name Changing Alarm tone/video Setting handset to vibrate at Alarm Time Sounding Alarm tone even in Manner mode Activating Alarm based on World Clock time (P.9-33)

**At Alarm Time**

Alarm activates; sounds/vibrates by related settings.

**Stopping Alarm**

- Press a key.

**When Another Function is Active**

- Alarm may not activate until handset returns to Standby.

**Incoming Calls**

- Active Alarm stops for incoming calls. Information window opens after handset returns to Standby.

**When Snooze is Set**

Alarm repeats at the set interval. Other Alarms do not activate while handset is Snoozing.

**Canceling Snooze**

While Snoozing,  → Yes →

- Snooze is automatically canceled after a period of time.

**Canceling Alarm**

1 In Alarm list, select entry →

2 **Switch Off** →

- Reactivate entry to use the same settings.

**Reactivating Entry**

In , **Switch On** →

**Deleting Alarm****One Entry**

1 In Alarm list, select entry →

2 **Reset Alarm** →

3 **Yes** →

**All Entries**

1 In Alarm list, select entry →

→ **Clear All** →

2 **Enter Handset Code** →

→ **Yes** →



# Using Wakeup TV

## Setting Wakeup TV

Follow these steps to activate TV at a specific time on a specific day of the week:

- Complete TV Area Setup beforehand.
- TV may not activate in poor signal conditions.

**1** **Tools** **In PIM/Lifestyle menu, Wakeup TV**



Wakeup TV List


**2** **--:--** **Enter hour (24-hour format)** **Enter minutes**



Wakeup TV Menu

**3** **Repeat:**

**4** **Selected Days**



**5** **Select day** **(/****)** **Complete selection**

**6** **Channel:**

**7** **Select channel**

**8** **Saved**  
• For more settings, repeat **2** - **3**.

**9** **Wakeup TV setting ends**

### Activating TV Once or Daily

In **4**, **Once or Every Day (All)** **From** **3**

### Selecting/Canceling All Days

In **5**, **Check All or Uncheck All**

### Excluding Holidays

In **5**, select day (/

/

) **Complete selection** **Except**

**Holidays** **From** **3**

### Canceling Alarm

• Alarm activates at Wakeup TV time. To

cancel Alarm, follow these steps:

[Wakeup TV Menu] **Alarm On/Off:**

**Off** **From** **3**

### Adjusting Alarm Volume

[Wakeup TV Menu] **Alarm Volume:**

**Adjust level** **From** **3**

## Advanced

- Editing entries
- Changing Alarm tone/video
- Sounding Alarm tone even in Manner mode (P.9-34)

## At Wakeup TV Time

TV activates after Alarm.



## Stopping Alarm Instantly

- While Alarm sounds/vibrates, press a key.

## When Another Function is Active

- TV may not activate depending on the function.

## After TV is On for a Period of Time

- Confirmation appears. Choose **Yes** and press  to exit TV.

## Canceling Wakeup TV

- 1 In Wakeup TV list, select entry ➔
- 2 **Wakeup TV Off** ➔ 
  - Reactivate entry to use the same settings.

## Reactivating Entry

In , **Wakeup TV On** ➔

## Deleting Wakeup TV

## ■ One Entry

- 1 In Wakeup TV list, select entry ➔
- 2 **Reset Alarm** ➔
- 3 **Yes** ➔

## ■ All Entries

- 1 In Wakeup TV list, select entry ➔  ➔ **Clear All** ➔
- 2 Enter Handset Code ➔  ➔ **Yes** ➔

## Using Calculator

- 1 In PIM/  
Lifestyle menu, *Calculator*



Calculator Window

- 2 Use Keypad to enter digits  
 Calculate
- 3 Calculator ends

### Key Assignments

+ (Add)	
- (Subtract)	
x (Multiply)	
÷ (Divide)	
= (Sum)	
C-CE (Clear)	
CM (Clear Memory)	
RM (Recall Memory)	
M+ (Add to Memory)	
. (Decimal)	
+/- (Positive/Negative Value)	
% (Percentage)	

### Memory Calculation

- Clear Memory before starting new Memory calculations.
- Numbers saved in Memory remain until handset power is turned off.

### Incoming Calls

- Calculations are not affected. End the call to return to Calculator.

### Using % Function

Use to find definite percentage of a known value.

Example: Calculate 30% of 800,000

- Enter *800,000* *x* *30* *%*  
 ■ *240,000* appears.

### Advanced

- Copying calculation results Changing exchange rate for currency conversion Converting currencies (P.9-34)

## Adding Expenses

### Entering Expenses

- 1 Enter amount →



- 2



- 3 Select Category → → Saved

#### Saving under Custom Category

In 3, Other → → Enter name →

### Checking Entries

- 1 → Tools → → In PIM/  
Lifestyle menu, Expenses  
Memo →



- 2 Totals →



Expenses Memo List

- 3 → Standby returns

#### Saving Entries to Notepad

[Expenses Memo List] → Save to  
Notepad →

- All expense details are saved as a single entry.

### Deleting Entries

- One Entry

- 1 In Expenses Memo list,  
select entry →

- 2 Delete Item → → Yes →

- All Entries

- 1 In Expenses Memo list, →  
Delete All →

- 2 Enter Handset Code →   
→ Yes →

### Advanced

- Changing Category of saved entry Changing amount Renaming Categories (P.9-34)

## Osaifu-Keitai® (Japanese)

Osaifu-Keitai® describes IC Card-equipped handsets that support e-money or credit functions/services. Osaifu-Keitai® encompasses a range of IC Card-based services on FeliCa-compatible SoftBank handsets. 831SH supports Osaifu-Keitai®. To use e-money, e-ticketing and reward points, etc., hold handset over a compatible reader/writer at shops, restaurants, and other retail outlets, etc.

### Basics

Before using Osaifu-Keitai®, activate Lifestyle-Appli, complete registration, customize settings and charge accounts.

#### Starting Lifestyle-Appli

- ➔ *Tools* ➔ □ ➔ In PIM/Lifestyle menu, *Osaifu-Keitai* ➔ □ ➔ *Lifestyle-Appli* ➔ □ ➔ *Select application* ➔ □

#### Lifestyle-Appli Precautions

- Contact Osaifu-Keitai® service providers for Lifestyle-Appli registration and usage details.
- Keep service passwords/customer service contact information, etc. in a separate place.

### Advanced

- ☞ ● Enabling to view e-money balances ● Checking e-money balance on External Display ● Moving applications up/down Balance Info list ● Removing applications from Balance Info list (P.9-35)


### Using Osaifu-Keitai®

Follow these steps to conduct a transaction:

Example: Making an electronic payment

- Lifestyle-Appli activation is not necessary.
- Transactions are possible even when handset power is off (if battery is adequately charged).
- Calls/Internet transmissions do not affect transactions.

- 1 Place  logo over reader/writer ➔ Confirm scan results

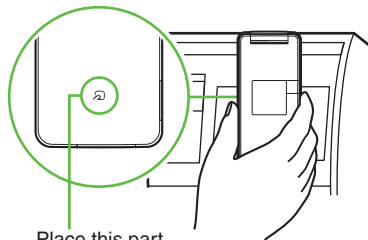

Place this part  
over reader/writer

- Align handset parallel to reader/writer.

### Important Osaifu-Keitai® Usage Note

SoftBank is not liable for damages resulting from accidental loss/alteration of IC Card data/settings.

#### When Placed Over Sensor

- If recognition is slow, move handset around slightly.
- Handset may respond automatically for some services.

## Locking IC Card


### IC Card Lock

Use this function to restrict access to/prevent unauthorized use of Osaifu-Keitai® on handset.

- 1 **Tools** **In PIM/  
Lifestyle menu, Osaifu-Keitai**



- 2 **IC Card Settings**



IC Card Settings Menu

- 3 **IC Card Lock** **On**

- 4 **Enter Handset Code**   
 **Yes**

### Canceling IC Card Lock

- In , **IC Card Lock** **Off**   
 **Enter Handset Code**

### Advanced

- Customizing handset response to reader/writer commands Opening IC Card properties Changing IC Card Lock notice recipient Changing required Missed Call count for Call Remote Lock Restoring default Osaifu-Keitai® settings (P.9-35)

## Remote Lock

Disable Osaifu-Keitai® remotely by mail or phone.

<b>Mail Remote Lock</b>	Send mail to activate Remote Lock
<b>Call Remote Lock</b>	Call from a specified phone to activate Remote Lock

### Mail Remote Lock

#### ■ Preparation on Handset

- 1 → **Tools** → → **In PIM/Lifestyle menu, Osaifu-Keitai** →
- 2 **IC Card Settings** →
- 3 **Remote Lock** → → **Enter Handset Code** →



#### 4 **Mail Remote Lock** →



Mail Remote Lock Menu

#### 5 **Remote Lock PW** →

#### 6 **Enter password** →

#### 7 **Switch On/Off** →

#### 8 **On** → →

#### Canceling Mail Remote Lock

In , **Off** → →

■ **Activating Remote Lock via Mail**  
If handset cannot receive mail IC Card Lock is not set.

#### 1 **Send S! Mail or e-mail to handset with password as subject**

- After handset receives message, IC Card Lock is set and notice is sent as a reply.

## Call Remote Lock

### Preparation on Handset

1 → **Tools** → → **In PIM/Lifestyle menu, Osaifu-Keitai** →

2 **IC Card Settings** →

3 **Remote Lock** → → **Enter Handset Code** →




4 **Call Remote Lock** →



Call Remote Lock Menu

5 **Phone No. to Lck 1 or Phone No. to Lck 2** →



6 **Phone Book** → → **Select entry** → → **Select phone number** →

- Select **Phone Number** to enter directly.

7 **Switch On/Off** →

8 **On** → →

**Enabling Activation via Public Phone**  
In , **Set Public Phone** → → **On**  
→ → **From**

**Canceling Call Remote Lock**  
In , **Off** → →

■ **Activating Remote Lock via Phone**  
If handset cannot receive calls IC Card Lock is not set.

1 **Using one of the specified phones, call handset**

- Send Caller ID.

2 **Handset receives call** → **End the call**

- The call is recorded as a Missed Call.

3 **Within three minutes, repeat 1 - 2 twice**



- After the third Missed Call, IC Card Lock is set; a message announces Remote Lock activation. Confirm the message and end the call.

**If Series is Interrupted by Another Call**

- Missed Call count is reset. Start over from the beginning.




## Faking Incoming Calls

Handset rings to emulate an incoming call.

- Save name and phone number to show as Caller ID.
- Ringer may be muted by handset settings. To override Silent setting, see P.9-36.

### Setting Simulated Call


- 1 → **Tools** → → **In PIM/Lifestyle menu, Simulated Call** →



Simulated Call Menu

- 2 **Switch On/Off** → → **On** →

- 3 **Set Caller** →



- 4 **Name:** → → **Enter name** →

- 5 **Phone Number:** → → **Enter phone number** → →

- 6 **Assign Tone** → → **Select tone/file** →

- 7 → **PIM/Lifestyle menu returns**

#### When Name and Phone Number are Unset

- Handset rings with Caller ID "Withheld."

#### Canceling Simulated Call

[Simulated Call Menu] **Switch On/Off**  
→ → **Off** → →

#### Setting Wait Time

[Simulated Call Menu] **Receive Timing**  
→ → **Select time** → →

### Using Simulated Call

- 1 **(Long)**
  - Available regardless of handset position.
  - Handset rings and incoming Voice Call window opens.
  - Ringtone stops after a period of time.
- 2 **In incoming Voice Call window, press**
- 3 → **Simulated Call ends**

#### When Receive Timing is Not Immediately

- Press or during wait time to cancel Simulated Call activation.
- Simulated Call activation is canceled by incoming calls, Alarms, etc. during wait time.


### Advanced

- Starting via Simulated Call menu
- Clearing caller information
- Overriding Silent volume setting (P.9-36)

## Using Stopwatch

Stopwatch stops when battery runs low.

- 1  ➔ **Tools** ➔  ➔ **Clocks/Gauges** ➔  ➔ **Stopwatch** ➔ 



Stopwatch Window

- 2  ➔ **Stopwatch starts**
- 3  ➔ **Stopwatch stops**
  - Press  to resume.
- 4  ➔ **Yes** ➔  ➔ **Stopwatch ends**
  - Records are deleted when Stopwatch ends.


### Recording Lap Times

While Stopwatch is running, 

### Saving Records to Notepad

After   ➔ **Save to Notepad** ➔ 

### Resetting Records


After   ➔ **From** 

### Incoming Calls

- Stopwatch is not affected by incoming calls. End the call to return.


## Using Countdown Timer

- 1** **Tools** **Countdown Timer**



Timer Entry Window

- 2** **Enter minutes** **Enter seconds**



Countdown Timer Window

- Press to change time.

- 3** **Countdown starts**  
 • Press to stop/resume countdown.

- 4** **Set time elapses** **Tone sounds**

- 5** **Countdown Timer ends**

### Using Timer Records

- After **1**,

### Resetting Timer


- Stop countdown and

### Incoming Calls

- Countdown is not affected by incoming calls. End the call to return.

### When Set Time Elapses

Tone sounds.



### Stopping Tone Instantly

- Press or a Side Key. (Tone stops automatically after a period of time.)

### When Timer Time Elapsed during a Call

- Tone sounds after the call.

## Opening World Clock

- 1  → **Tools** →  →   
**Clocks/Gauges** → **World Clock** → 



Local Time Zone

World Time Zone

- 2 




Set Time Zone Window

- 3  **Select area** → 

- 4  → **World Clock ends**

### Advancing One Hour (Daylight Saving)

[Set Time Zone Window] 

- To cancel, press .

### Adding Custom Time Zone


[Set Time Zone Window]  → Enter city name →  → + or - →  →

Enter time difference → 

## Opening World Clock in Standby

- 1  → **Settings** →  → **In Phone menu, Display** → 

- 2 **Standby Display** → 



- 3 **Clock/Calendar** → 

- 4 **World Clock (L), etc.** → 

## Using Hour Minder

### Setting Hour Minder

Follow these steps to activate the hourly time signal at selected hours:


- 1 → **Tools** → → **Clocks/Gauges** → **Hour Minder** →



Hour Minder Menu

- 2 **Switch On/Off** → → **On** →

- 3 **Select Time** →



- 4 **Select hour** → (/) → **Complete selection** →

### Advanced

- Changing Hour Minder tone/video
- Setting handset to vibrate at Hour Minder Time
- Sounding Hour Minder tone even in Manner mode
- Activating Hour Minder based on World Clock time (P.9-36)

- 5 → **Saved**

- 6 → **Hour Minder setting ends**

#### Adjusting Hour Minder Volume

- In 2, **Advanced** → → **Volume:** → → **Adjust level** → → **From** 5

#### Changing Hour Minder Duration

- In 2, **Advanced** → → **Duration:** → → **Select time** → → **From** 5

- For custom Duration, select **Other**.

#### Selecting/Canceling All Hours

- In 4, → **Check All or Uncheck All** →

### At Hour Minder Time

Hour Minder activates; sounds/vibrates by related settings.



#### Stopping Tone Instantly

- Press a key.

#### When Another Function is Active

- Hour Minder does not activate.

#### Incoming Calls

- Active Hour Minder stops for incoming calls.

### Canceling Hour Minder

- 1 In Hour Minder menu, **Switch On/Off** → → **Off** → →


## Opening PC Documents

Supported File Formats:

- PDF (.pdf)
- Microsoft® Excel® (.xls)
- Microsoft® Word (.doc)
- Microsoft® PowerPoint® (.ppt)

- Some files may not appear correctly.
- Download files via the Internet.
- When transferring files from PCs, save to corresponding Memory Card folder (P.15-23).

**1** ➔ **Tools** ➔ ➔ **Doc./Rec.** ➔ **Document Viewer** ➔



**2** **Select file** ➔

**Zooming In/Out with Loupe (Magnifier)**  
 In open file, (Long) ➔ **Specify portion** ➔ ➔ **Zoom Out or Zoom In** ➔


### Key Assignments

	View whole page
	Scroll
	View upper left
	Toggle full screen view on/off
	View upper right
	Zoom out
	Continuous zoom out
	View center
	Zoom in
	Continuous zoom in
	View lower left
	Jump to page
	View lower right
	Open Help
	Next page
	Previous page
	Fit width
	Rotate 90°

## Saving Text


### New Notepad Entry

- 1 → **Tools** → → → **Doc./Rec.** → **Notepad** →



Notepad List

- 2 **<Add New Entry>** →



- 3 **Enter text** →

- 4 **Select Category** → → **Saved**

### Sorting Entries Temporarily

[Notepad List]


- Press repeatedly to toggle sort options (Modified, Created, Category and Accessed).

### Inserting Notepad Text during Text Entry

- In a text entry window, → **Notepad** → → **Call Notepad** → → **Select entry** →

### Opening Notepad

- 1 In Notepad list, select entry →



- 2 → **List returns**

### Deleting Entries

#### ■ One Entry

- 1 In Notepad list, select entry →

- 2 **Delete Item** → → **Yes** →

#### ■ All Entries

- 1 In Notepad list, select entry → → **Setting/Manage** →

- 2 **Delete All** → → **Enter Handset Code** → → **Yes** →

### Advanced

- Editing Notepad ● Searching text within all entries ● Inserting Notepad text into message text ● Sending entries via S! Mail ● Creating text files
- Importing text files ● Checking memory status ● Opening properties (P.9-37)


## Using ASCII Art

### Inserting ASCII Art



- 1 In message text entry window,  
 ➔ **Call ASCII Art** ➔ 







- 2 Select entry ➔ 



### Previewing ASCII Art

- In 2, select entry ➔ 
- Press  to insert ASCII Art.

### Editing Entries

- 1  ➔ **Tools** ➔  ➔   
**Doc./Rec.** ➔ **ASCII Art** ➔ 



ASCII Art List

- 2 Select entry ➔  ➔ **Edit** ➔ 




### Opening Entries

- In 2, select entry ➔  ➔ **View** ➔ 

### Adding New Entries

- In 2, <Empty> ➔  ➔ **Create ASCII Art** ➔ 

### Deleting Entries

- 1 In ASCII Art list, select entry  
 ➔  ➔ **Delete** ➔ 
- 2 **Yes** ➔ 




## Recording/Playing Voice

### Recording

- If battery runs low while recording, Voice Recorder shuts off.
- Record conversations during calls via **Record Caller Voice**.


- 1 → **Tools** → → **Doc./Rec.** → **Voice Recorder** →



Recording Window

- 2 → **Recording starts**

- 3 → **Recording stops**



- For **Extended Voice**, recording is saved automatically.

- 4 **Save** →

#### Play Before Saving

In 4, **Playback** → → **Playback starts**

→ → **Playback stops**

#### Starting Over

In 4, → **From** 2

### Playback

- 1 In recording window, → **Ring Songs-Tones** →



- 2 **Select file** →

#### Playing Data Folder Files

→ **Data Folder** → → **Ring Songs-Tones** → → **Select file** →

#### Playback Operations

	Adjust volume
	Pause/resume
	Stop


### Advanced


- Saving longer recordings
- Sending Voice files via S! Mail
- Switching storage media (P.9-37)

## Scanning Barcodes

Scan UPC/JAN (1D barcodes) or QR Codes (2D barcodes).


- Membership file or password may be required when scanning barcodes.
- Some barcodes may not be scanned.

- 1**  **Tools**   **Doc./Rec.**  **Barcode/Scan**  

- 2** **Scan Barcode**  


- 3** **Frame barcode in center of Display**




Scan Window

- Use Focus Adjustment Bar as a guide (better focus in darker blue).







- 4**  **Scan starts**

- If recognition takes time, slowly adjust the distance between handset and barcode.
- Press  to stop scan.

- 5** **Tone sounds**  **Scan results appear**



### Key Assignments in Scan Window

- : **Toggle focus mode**
- : **Switch to Photo Camera**
- : **Focus Lock**
- : **Mobile Light on/off**
- : **Adjust brightness**
- : **Open Help**














### Split Data

- After scanning, confirmation appears. Follow onscreen prompt(s).
- Scan results do not appear until all split data is scanned.

### Starting Over

- After   **Yes**   **From** 

### Advanced

-    Scanning during text entry  Scanning continuously  Reading saved barcode images  Saving scan results  Saving to Notepad  Saving linked info to Phone Book  Opening saved scan results  Using linked info  Using images as Wallpaper  Saving images & melodies  Copying text (And more on P.9-38 - 9-39)

## Creating QR Codes

Create QR Codes from these items on handset:




Large items are divided into multiple QR Codes.

### Procedure


Follow these steps to create QR Codes from Data Folder files:

- 1 → **Tools** → → **Doc./Rec.** → **Barcode/Scan** →



- 2 **Create QR Code** →

- 3 **Data Folder** →



- 4 **Select folder** → → **Select file or entry** →

- QR Code is created.

- 5

- QR Code is saved to Data Folder (Pictures).

### From Phone Book Entries

In , **Phone Book** → → **Select entry** → →

### From My Details

In , **My Details** → → **Select item** → →

### From Entered Text

In , **Text Input** → → **Enter text** → →

### Switching Storage Media

In , → **Save to** → → **Phone or Memory Card** → →

### Attaching to S! Mail

In , → **Send As** → → **Complete message** →

### Incoming Calls


- QR Code creation is not affected by incoming calls. End the call to return.

## Scanning Business Cards

Scan business cards and save names, addresses, etc. to Phone Book.

- English business cards may not be scanned correctly.
- Some cards may not be scanned.

- 1** **Tools** **Barcode/Scan**



- 2** **Scan Card**


- 3** **Frame card on Display**



Scan Window

- 4**
- Press to stop scan.

- 5** **Scan results appear**



- 6**
- New Phone Book entry is saved.

### Key Assignments in Scan Window

- : Toggle focus mode
- : Switch to Photo Camera
- : Focus Lock
- : Mobile Light on/off
- : Adjust brightness
- : Open Help

### If Text Exceeds Phone Book Entry Item Character Limit

- Confirmation appears. Follow these steps to delete overage:  
**Yes**

### Changing Save Location

- After , **Save to**

### Saving Scanned Image as Phone Book Picture

- After , **Add Image**

### Starting Over

- After , **Yes**


### Advanced

- Saving to Notepad
- Pasting to message text
- Copying text (P.9-40)

## Scanning Text


Some text cannot be scanned.

- 1** **Tools** **Barcode/Scan**  
**Doc./Rec.** **Barcode/Scan**



- 2** **Scan Text**

- 3** **Frame text in center of Display**




- Adjust to frame text in [ ].
- Use Focus Adjustment Bar as a guide (better focus in darker blue).

- 4**
- Press to stop scan.

- 5** **Select line** **Scan results appear**

- 6**



### Key Assignments in Scan Window

- : Toggle focus mode
- : Switch to Photo Camera
- : Focus Lock
- : Mobile Light on/off
- : Adjust brightness
- : Open Help

### Correcting Text Type

- After **Change Mode**
- Select type

### Editing Scanned Text

- After **Select/Edit**
- Select character Select alternative from list or edit directly

### Starting Over

- In **Yes** **From**

## Advanced

- Scanning during text entry Scanning more text Saving scan results Saving linked info to Phone Book Saving to Notepad Opening saved scan results Using linked info Pasting to message text Copying text (P.9-40 - 9-41)

## Calendar

### View Settings

Changing default view	<p> <input type="checkbox"/> → <i>Tools</i> → <input type="checkbox"/> → In PIM/Lifestyle menu, <i>Calendar</i> → <input type="checkbox"/> → <input type="checkbox"/> → <i>Calendar Settings</i> → <input type="checkbox"/> → <i>Default View</i> → <input type="checkbox"/> → Select type → <input type="checkbox"/> </p>
Jumping to specified date	<p> <input type="checkbox"/> → <i>Tools</i> → <input type="checkbox"/> → In PIM/Lifestyle menu, <i>Calendar</i> → <input type="checkbox"/> → [+8] → Enter date → <input type="checkbox"/> </p>
Changing date color	<p> <input type="checkbox"/> → <i>Tools</i> → <input type="checkbox"/> → In PIM/Lifestyle menu, <i>Calendar</i> → <input type="checkbox"/> → See below                 </p> <p> <b>By Days of the Week</b>  <input type="checkbox"/> → <i>Calendar Settings</i> → <input type="checkbox"/> → <i>Set Color</i> → <input type="checkbox"/> → <i>By Week</i> → <input type="checkbox"/> → Select day → <input type="checkbox"/> → Select color → <input type="checkbox"/> </p> <p> <b>By Date</b>                      Select date → [+4] → Select color → <input type="checkbox"/> </p> <p> <b>Resetting "By Date" Colors</b>  <input type="checkbox"/> → <i>Calendar Settings</i> → <input type="checkbox"/> → <i>Set Color</i> → <input type="checkbox"/> → <i>Reset Color</i> → <input type="checkbox"/> → Select option → <input type="checkbox"/> → Yes → <input type="checkbox"/> </p>
	<p> <input type="checkbox"/> → <i>Tools</i> → <input type="checkbox"/> → In PIM/Lifestyle menu, <i>Calendar</i> → <input type="checkbox"/> → <input type="checkbox"/> → <i>Calendar Settings</i> → <input type="checkbox"/> → <i>Tasks View</i> → <input type="checkbox"/> → Select option → <input type="checkbox"/> </p>
	<p> <input type="checkbox"/> → <i>Tools</i> → <input type="checkbox"/> → In PIM/Lifestyle menu, <i>Calendar</i> → <input type="checkbox"/> → Select date → [+2] → Select stamp → <input type="checkbox"/> </p> <p>                     • Available in Month View only.                 </p>
	<p> <input type="checkbox"/> → <i>Tools</i> → <input type="checkbox"/> → In PIM/Lifestyle menu, <i>Calendar</i> → <input type="checkbox"/> → Select date → <input type="checkbox"/> → Select entry → <input type="checkbox"/> → <i>Secret</i>: → <input type="checkbox"/> → <i>On</i> → <input type="checkbox"/> → <input type="checkbox"/> </p>

Saving additional holidays	<p> <input type="checkbox"/> → <i>Tools</i> → <input type="checkbox"/> → In PIM/Lifestyle menu, <i>Calendar</i> → <input type="checkbox"/> → <input type="checkbox"/> → <i>Calendar Settings</i> → <input type="checkbox"/> → <i>Set Holiday</i> → <input type="checkbox"/> → <input type="checkbox"/> → <i>Private</i> → See below                 </p> <p> <b>Adding Holidays</b>                      &lt;Empty&gt; → <input type="checkbox"/> → Enter name → <input type="checkbox"/> → Enter date → <input type="checkbox"/> → Select frequency → <input type="checkbox"/> → <input type="checkbox"/> </p> <p> <b>Editing Added Holidays</b>                      Select holiday → <input type="checkbox"/> → <i>Edit</i> → <input type="checkbox"/> → <i>Name</i>: → <input type="checkbox"/> → Enter name → <input type="checkbox"/> → <i>Date</i>: → <input type="checkbox"/> → Enter date → <input type="checkbox"/> → Select frequency → <input type="checkbox"/> → <input type="checkbox"/> </p>
	<p> <input type="checkbox"/> → <i>Tools</i> → <input type="checkbox"/> → In PIM/Lifestyle menu, <i>Calendar</i> → <input type="checkbox"/> → <input type="checkbox"/> → <i>Calendar Settings</i> → <input type="checkbox"/> → <i>Set Holiday</i> → <input type="checkbox"/> → <input type="checkbox"/> → <i>Private or Public</i> → Select holiday → <input type="checkbox"/> (<input type="checkbox"/>/✓)                 </p>
Removing/restoring preset holidays	<p> <input type="checkbox"/> → <i>Tools</i> → <input type="checkbox"/> → In PIM/Lifestyle menu, <i>Calendar</i> → <input type="checkbox"/> → <input type="checkbox"/> → <i>Calendar Settings</i> → <input type="checkbox"/> → <i>Set Holiday</i> → <input type="checkbox"/> → <input type="checkbox"/> → <i>Private or Public</i> → Select holiday → <input type="checkbox"/> (<input type="checkbox"/>/✓)                 </p>
<h3>Saving/Editing Schedules</h3>	
Setting Category/Location	<p> <input type="checkbox"/> → <i>Tools</i> → <input type="checkbox"/> → In PIM/Lifestyle menu, <i>Calendar</i> → <input type="checkbox"/> → Select date → <input type="checkbox"/> → Select entry → <input type="checkbox"/> → <input type="checkbox"/> → See below                 </p> <p> <b>Category</b>  <i>Category</i>: → <input type="checkbox"/> → Select Category → <input type="checkbox"/> → <input type="checkbox"/> </p> <p> <b>Location</b>  <i>Location</i>: → <input type="checkbox"/> → Enter location → <input type="checkbox"/> → <input type="checkbox"/> </p>
	<p> <input type="checkbox"/> → <i>Tools</i> → <input type="checkbox"/> → In PIM/Lifestyle menu, <i>Calendar</i> → <input type="checkbox"/> → Select date → <input type="checkbox"/> → Select entry → <input type="checkbox"/> → <input type="checkbox"/> → <i>Repeat</i>: → <input type="checkbox"/> → Select frequency → <input type="checkbox"/> → Enter repeat time → <input type="checkbox"/> → <input type="checkbox"/> </p> <p>                     • Repeat time is not available for <i>Every Year</i>.                 </p>

Saving S! Friend's Status information	<p><b>Start Here</b> → <b>Tools</b> → In PIM/Lifestyle menu, <b>Calendar</b> → Select date → Select entry → <b>S! Friend's Status:</b> → <b>Link Setting:</b> → <b>Linked</b> → See below</p> <p><b>Availability</b>  <b>Answer Status:</b> → <b>Edit</b> → Set Category first.</p> <p><b>Comment</b>  <b>Comment:</b> → Enter text → Set Category first.</p>
Editing entries	<p>→ <b>Tools</b> → In PIM/Lifestyle menu, <b>Calendar</b> → Select date → Select entry → Select item → Edit in the same manner as saving schedules →</p>
Changing Alarm tone/video & duration	<p><b>Start Here</b> → <b>Tools</b> → In PIM/Lifestyle menu, <b>Calendar</b> → Select date → Select entry → <b>Alarm:</b> → See below</p> <p><b>Alarm Tone/Video</b>  <b>Assign Tone/Video:</b> → Select folder → Select tone/file → Set start point if required.</p> <p><b>Duration</b>  <b>Duration:</b> → Select time →</p>
Changing Alarm volume	<p>→ <b>Tools</b> → In PIM/Lifestyle menu, <b>Calendar</b> → <b>Alarm Settings</b> → <b>Alarm Volume:</b> → Adjust level →</p>
Selecting Vibration option	<p>→ <b>Tools</b> → In PIM/Lifestyle menu, <b>Calendar</b> → <b>Alarm Settings</b> → <b>Vibration:</b> → Select option →</p>

Sounding Alarm tone even in Manner mode	<p>→ <b>Tools</b> → In PIM/Lifestyle menu, <b>Calendar</b> → <b>Alarm Settings</b> → For Manner Mode: → <b>Ring</b> → <b>Yes</b> →</p>
---	--

## Managing Schedules

Searching entries	<p><b>Start Here</b> → <b>Tools</b> → In PIM/Lifestyle menu, <b>Calendar</b> → See below</p> <p><b>By Subject</b>          *6 → Enter text →</p> <p><b>By Category</b>          *9 → Select Category →</p>
Checking memory status	<p>→ <b>Tools</b> → In PIM/Lifestyle menu, <b>Calendar</b> → Select date → <b>Memory Status</b> →</p>
Deleting all entries	<p>→ <b>Tools</b> → In PIM/Lifestyle menu, <b>Calendar</b> → <b>Delete</b> → <b>All Appointments</b> → Enter Handset Code → <b>Yes</b> →</p>
Deleting entries by specifying week (Week View)	<p><b>Start Here</b> → <b>Tools</b> → In PIM/Lifestyle menu, <b>Calendar</b> → See below</p> <p><b>Within One Week</b>          Select date → <b>Delete</b> → <b>All This Week</b> → <b>Yes</b> →</p> <p><b>Up to the End of Previous Week</b>          Select date → <b>Delete</b> → <b>Up to Last Week</b> → <b>Yes</b> →</p>

Deleting entries by specifying month (Month View)	Start Here → Tools → In PIM/Lifestyle menu, <i>Calendar</i> → See below
	<p><b>Within One Month</b>            Select date → Delete → All This Month → Yes</p> <p><b>Up to the End of Previous Month</b>            Select date → Delete → Up to Last Month → Yes</p>
Deleting entries in two months (2Month View)	Tools → In PIM/Lifestyle menu, <i>Calendar</i> → Delete → All This 2Months → Yes

## Tasks

### ■ Task List

Hiding tasks	Tools → In PIM/Lifestyle menu, <i>Tasks</i> → Select task → Edit → Secret: → On
--------------	---

### ■ Saving/Editing Tasks

Editing tasks	Tools → In PIM/Lifestyle menu, <i>Tasks</i> → Select task → Edit → Select item → Edit in the same manner as saving tasks
Setting priority	Tools → In PIM/Lifestyle menu, <i>Tasks</i> → Select task → Edit → Priority: → Select option

Changing Alarm tone/video & duration	Start Here → Tools → In PIM/Lifestyle menu, <i>Tasks</i> → Select task → Edit → Alarm: → See below
	<p><b>Alarm Tone/Video</b>            Assign Tone/Video: → Select folder → Select tone/file → Yes</p> <p>• Select start point if required.</p> <p><b>Duration</b>            Duration: → Select time → Yes</p>
Changing Alarm volume	Tools → In PIM/Lifestyle menu, <i>Tasks</i> → Alarm Settings → Alarm Volume: → Adjust level
Selecting Vibration option	Tools → In PIM/Lifestyle menu, <i>Tasks</i> → Alarm Settings → Vibration: → Select option
Sounding Alarm tone even in Manner mode	Tools → In PIM/Lifestyle menu, <i>Tasks</i> → Alarm Settings → For Manner Mode: → Ring → Yes



## Managing Tasks

Searching tasks	<p>[Start Here] → Tools → In PIM/Lifestyle menu, <b>Tasks</b> → Find → See below</p> <p><b>By Subject</b> By Subject → Enter text</p>
	<p><b>By Due Date</b> By Due Date → Enter date</p>
Sorting tasks by priority	<p>Tools → In PIM/Lifestyle menu, <b>Tasks</b> → Sort → Priority</p>
Checking memory status	<p>Tools → In PIM/Lifestyle menu, <b>Tasks</b> → Memory Status</p>
Deleting all tasks	<p>Tools → In PIM/Lifestyle menu, <b>Tasks</b> → Delete → All Tasks → Enter Handset Code → Yes</p>

## Alarms

Editing entries	<p>Tools → In PIM/Lifestyle menu, <b>Alarms</b> → Select entry → Select item → Edit in the same manner as saving entries</p>
Saving entry name	<p>Tools → In PIM/Lifestyle menu, <b>Alarms</b> → Select entry → <b>Subject:</b> → Enter name</p>
Changing Alarm tone/video	<p>[Start Here] → Tools → In PIM/Lifestyle menu, <b>Alarms</b> → Select entry → <b>Assign Tone/Video:</b> → See below</p> <p><b>Using Preset Tone or Data Folder File</b> Select folder → Select tone/file</p> <ul style="list-style-type: none"> <li>Select start point if required.</li> </ul> <p><b>Using Customized Screen Tone/Video</b> Customized Screen</p>
Setting handset to vibrate at Alarm Time	<p>Tools → In PIM/Lifestyle menu, <b>Alarms</b> → Select entry → <b>Vibration:</b> → On or Link to Sound</p> <ul style="list-style-type: none"> <li>Select <b>Link to Sound</b> to allow compatible SMAF files to control vibration.</li> </ul>
Sounding Alarm tone even in Manner mode	<p>Tools → In PIM/Lifestyle menu, <b>Alarms</b> → Settings → For Manner Mode → Ring → Yes</p>
Activating Alarm based on World Clock time	<p>Tools → In PIM/Lifestyle menu, <b>Alarms</b> → Settings → Link to World Clk → On</p>

## Wakeup TV

Editing entries	<ul style="list-style-type: none"> <li>• <b>Tools</b> → • In PIM/Lifestyle menu, <i>Wakeup TV</i> → • Select entry → •</li> <li>Select item → • Edit in the same manner as saving entries → </li> </ul>
Changing Alarm tone/video	<p><b>Start Here</b> → • <b>Tools</b> → • In PIM/Lifestyle menu, <i>Wakeup TV</i> → • Select entry → •</p> <p>→ <i>Assign Tone/Video:</i> → • See below</p> <p><b>Using Preset Tone or Data Folder File</b></p> <p>Select folder → • Select tone/file → • </p> <ul style="list-style-type: none"> <li>• Select start point if required.</li> </ul> <p><b>Using Customized Screen Tone/Video</b></p> <p><i>Customized Screen</i> → • </p>
Sounding Alarm tone even in Manner mode	<ul style="list-style-type: none"> <li>• <b>Tools</b> → • In PIM/Lifestyle menu, <i>Wakeup TV</i> → • <i>For Manner Mode</i> → •</li> <li><i>Ring</i> → • <i>Yes</i> → •</li> </ul>

## Calculator

Copying calculation results	While result appears,  → <i>Copy</i> → •
Changing exchange rate for currency conversion	<ul style="list-style-type: none"> <li>• <b>Tools</b> → • In PIM/Lifestyle menu, <i>Calculator</i> → •  → <i>Money Converter</i> → •</li> <li>→ <i>Exchange Rate</i> → • <i>Domestic or Foreign</i> → • Enter rate → •</li> </ul>
Converting currencies	<ul style="list-style-type: none"> <li>• <b>Tools</b> → • In PIM/Lifestyle menu, <i>Calculator</i> → • Enter amount of money →  → <i>Money Converter</i> → • <i>To Domestic or To Foreign</i> → •</li> <li>• Set Exchange Rate first.</li> </ul>

## Expenses Memo

Changing Category of saved entry	<ul style="list-style-type: none"> <li>• <b>Tools</b> → • In PIM/Lifestyle menu, <i>Expenses Memo</i> → • <i>Totals</i> → •</li> <li>Select entry → • Select Category → •</li> </ul>
Changing amount	<ul style="list-style-type: none"> <li>• <b>Tools</b> → • In PIM/Lifestyle menu, <i>Expenses Memo</i> → • <i>Totals</i> → •</li> <li>Select entry →  → <i>Change Amount</i> → • Edit → •</li> </ul>
Renaming Categories	<ul style="list-style-type: none"> <li>• <b>Tools</b> → • In PIM/Lifestyle menu, <i>Expenses Memo</i> → • <i>Edit Category</i> → •</li> <li>→ Select Category → • Enter name → •</li> </ul>

Osaifu-Keitai®	
Enabling to view e-money balances	<ul style="list-style-type: none"> <li>• <b>Tools</b> → <b>In PIM/Lifestyle menu, Osaifu-Keitai</b> → <b>IC Card Settings</b> → <b>Balance Info</b> → <b>Enter Handset Code</b> → <b>&lt;Empty&gt;</b> → <b>SI Appli or Lifestyle-Appli</b> → <b>Select application</b></li> <li>• For use with compatible Lifestyle-Applications.</li> <li>• Start Lifestyle-Appli once before adding it to Balance Info list.</li> </ul>
Checking e-money balance on External Display	<ul style="list-style-type: none"> <li>• With handset closed, <b>(Long)</b> → <b>Balance appears</b> → <b>Balance disappears</b></li> <li>• Use <b>▶</b> to view balances of listed entries.</li> <li>• Save Lifestyle-Appli to Balance Info list beforehand.</li> <li>• Balances do not appear if IC Card Lock is active.</li> </ul>
Moving applications up/down Balance Info list	<ul style="list-style-type: none"> <li>• <b>Tools</b> → <b>In PIM/Lifestyle menu, Osaifu-Keitai</b> → <b>IC Card Settings</b> → <b>Balance Info</b> → <b>Enter Handset Code</b> → <b>Select application</b> → <b>Move</b> → <b>Select location</b></li> </ul>
Removing applications from Balance Info list	<ul style="list-style-type: none"> <li>• <b>Tools</b> → <b>In PIM/Lifestyle menu, Osaifu-Keitai</b> → <b>IC Card Settings</b> → <b>Balance Info</b> → <b>Enter Handset Code</b> → <b>Select application</b> → <b>Delete</b></li> </ul>
Customizing handset response to reader/writer commands	<ul style="list-style-type: none"> <li>• <b>Tools</b> → <b>In PIM/Lifestyle menu, Osaifu-Keitai</b> → <b>IC Card Settings</b> → <b>Interface Settings</b> → <b>Enter Handset Code</b> → <b>Select item</b> → <b>Off</b></li> </ul>
Opening IC Card properties	<ul style="list-style-type: none"> <li>• <b>Tools</b> → <b>In PIM/Lifestyle menu, Osaifu-Keitai</b> → <b>IC Card Settings</b> → <b>IC Card Status</b></li> </ul>

Changing IC Card Lock notice recipient	<ul style="list-style-type: none"> <li>• <b>Start Here</b> → <b>Tools</b> → <b>In PIM/Lifestyle menu, Osaifu-Keitai</b> → <b>IC Card Settings</b> → <b>Remote Lock</b> → <b>Enter Handset Code</b> → <b>Mail Remote Lock</b> → <b>Notice Settings</b> → <b>Send Notice</b> → <b>See below</b></li> </ul>
	<p><b>Changing Recipient</b></p> <ul style="list-style-type: none"> <li>• <b>To Set Recipient</b> → <b>Set Recipient</b> → <b>Select method</b> → <b>Select/enter number/address</b> → <b>OK</b> → <b>Y</b></li> <li>• Omit step of pressing <b>OK</b> when selecting <b>Phone Book</b> as setting method.</li> </ul>
Changing required Missed Call count for Call Remote Lock	<p><b>Disabling Notice</b></p> <ul style="list-style-type: none"> <li>• <b>Off</b> → <b>OK</b> → <b>Y</b></li> </ul>
	<ul style="list-style-type: none"> <li>• <b>Tools</b> → <b>In PIM/Lifestyle menu, Osaifu-Keitai</b> → <b>IC Card Settings</b> → <b>Remote Lock</b> → <b>Enter Handset Code</b> → <b>Call Remote Lock</b> → <b>Count for Lock</b> → <b>Enter Missed Call count</b> → <b>OK</b> → <b>Y</b></li> </ul>
Restoring default Osaifu-Keitai® settings	<ul style="list-style-type: none"> <li>• <b>Tools</b> → <b>In PIM/Lifestyle menu, Osaifu-Keitai</b> → <b>IC Card Settings</b> → <b>Set to Default</b> → <b>Enter Handset Code</b> → <b>Yes</b></li> </ul>

## Simulated Call

Starting via Simulated Call menu	<ul style="list-style-type: none"> <li>• <b>Tools</b> → <b>In PIM/Lifestyle menu, Simulated Call</b> → <b>Receive Simulated Call</b> → <b>Yes</b></li> <li>• Simulated Call starts immediately regardless of Receive Timing setting.</li> <li>• Settings remain even after starting Simulated Call during setup.</li> </ul>
Clearing caller information	<ul style="list-style-type: none"> <li>• <b>Tools</b> → <b>In PIM/Lifestyle menu, Simulated Call</b> → <b>Set Caller</b> → <b>Yes</b></li> </ul>
Overriding Silent volume setting	<ul style="list-style-type: none"> <li>• <b>Tools</b> → <b>In PIM/Lifestyle menu, Simulated Call</b> → <b>For Silent Mode</b> → <b>Ring</b> → <b>Yes</b></li> </ul>

## Hour Minder

Changing Hour Minder tone/video	<ul style="list-style-type: none"> <li>• <b>Start Here</b> → <b>Tools</b> → <b>Clocks/Gauges</b> → <b>Hour Minder</b> → <b>Advanced</b> → <b>Assign Tone/Video</b> → <b>See below</b></li> <li>• <b>Using Preset Tone or Data Folder File</b>  <b>Select folder</b> → <b>Select tone/file</b></li> <li>• Select start point if required.</li> <li>• <b>Using Customized Screen Tone/Video</b>  <b>Customized Screen</b></li> </ul>
Setting handset to vibrate at Hour Minder Time	<ul style="list-style-type: none"> <li>• <b>Tools</b> → <b>Clocks/Gauges</b> → <b>Hour Minder</b> → <b>Advanced</b> → <b>Vibration</b> → <b>On or Link to Sound</b></li> <li>• Select <b>Link to Sound</b> to allow compatible SMAF files to control vibration.</li> </ul>
Sounding Hour Minder tone even in Manner mode	<ul style="list-style-type: none"> <li>• <b>Tools</b> → <b>Clocks/Gauges</b> → <b>Hour Minder</b> → <b>Advanced</b> → <b>For Manner Mode</b> → <b>Ring</b> → <b>Yes</b></li> </ul>
Activating Hour Minder based on World Clock time	<ul style="list-style-type: none"> <li>• <b>Tools</b> → <b>Clocks/Gauges</b> → <b>Hour Minder</b> → <b>Advanced</b> → <b>Link to World Clk</b> → <b>On</b></li> </ul>

## Notepad

Editing Notepad	<p>Start Here → Tools → Doc./Rec. → Notepad → Select entry → See below</p> <p><b>Editing Text</b>  Edit Text → Edit</p> <p><b>Changing Category</b>  Change Category → Select Category</p>
	<p>Tools → Doc./Rec. → Notepad → Select entry → Search → Search</p> <p>Enter text</p>
Searching text within all entries	<p>Tools → Doc./Rec. → Notepad → Select entry → Send → As Message Text → S! Mail or SMS → Complete message</p> <ul style="list-style-type: none"> <li>S! Mail Composition window opens automatically depending on character count.</li> </ul>
Inserting Notepad text into message text	<p>Tools → Doc./Rec. → Notepad → Select entry → Send → Via Message → Complete message</p>
Sending entries via S! Mail	<p>Tools → Doc./Rec. → Notepad → Select entry → Setting/Manage → Create Text File → Enter name → Save here</p>
Creating text files	<p>Tools → Doc./Rec. → Notepad → Select entry → Setting/Manage → Import Text File → Select file</p>
Importing text files	<p>Tools → Doc./Rec. → Notepad → Select entry → Setting/Manage → Memory Status</p>
Checking memory status	

## Opening properties

Tools → Doc./Rec. → Notepad → Select entry → Details

## Voice Recorder

Saving longer recordings	<p>Tools → Doc./Rec. → Voice Recorder → Record Time → Recording starts → Recording ends</p> <ul style="list-style-type: none"> <li>Insert Memory Card to record in <i>Extended Voice</i> mode. (Recording is saved automatically.)</li> </ul>
Sending Voice files via S! Mail	<p>Tools → Doc./Rec. → Voice Recorder → Recording starts → Recording ends → Save and Send → Complete message</p> <ul style="list-style-type: none"> <li>Available in <i>For Message</i> mode.</li> </ul>
Switching storage media	<p>Tools → Doc./Rec. → Voice Recorder → Save Recording to → Select option</p> <ul style="list-style-type: none"> <li>Available in <i>For Message</i> mode.</li> <li>Set to <i>Ask Each Time</i> to select media after every recording.</li> </ul>

## Scan Barcode

Scanning during text entry	<p>[Start Here] In a text entry window,      in center of Display </p> <p><b>Pasting All Scan Results</b></p> <p></p>
	<p><b>Pasting a Part of Scan Results</b></p> <p> </p>
Scanning continuously	<p>       in center of Display </p> <ul style="list-style-type: none"> <li>Choose <b>Yes</b> to continue scanning or <b>No</b> and press  to view scan results.</li> </ul>
Reading saved barcode images	<p> </p>
Saving scan results	<p>     in center of Display </p>
Saving to Notepad	<p>     in center of Display </p>

## Saving linked info to Phone Book

- in center of Display
- To add to an existing entry, select **As New Detail**.
  - When **MEMORY:** appears in scan results, press to enter the items underlined with a dotted line automatically in Phone Book entry window.

## Opening saved scan results

- 
- Select a file and press to rename files, open properties or delete files.
  - Some files may not open.

## Using linked info

- [Start Here] in center of Display
- Dialing Numbers**
- Select phone number
- Sending Messages**
- Select mail address
- When **MAILTO:** appears in scan results, press to enter the items underlined with a dotted line automatically in Composition window.
- Accessing Internet Sites**
- Select URL

Using images as Wallpaper	<ul style="list-style-type: none"> <li>● → Tools → ● → Doc./Rec. → Barcode/Scan → ● → Scan Barcode → ● → Frame barcode in center of Display → ● → Select image → [img] → Set as Wallpaper → ● → [img]</li> <li>● For images smaller or larger than Display, Wallpaper Display options appear; follow onscreen prompts.</li> </ul>
Saving images & melodies	<ul style="list-style-type: none"> <li>● → Tools → ● → Doc./Rec. → Barcode/Scan → ● → Scan Barcode → ● → Frame barcode in center of Display → ● → Select file → [img] → To Data Folder → ●</li> </ul>
Opening or playing files	<ul style="list-style-type: none"> <li>● → Tools → ● → Doc./Rec. → Barcode/Scan → ● → Scan Barcode → ● → Frame barcode in center of Display → ● → Select file → ●</li> </ul>
Using images for System Graphics	<ul style="list-style-type: none"> <li>● → Tools → ● → Doc./Rec. → Barcode/Scan → ● → Scan Barcode → ● → Frame barcode in center of Display → ● → Select image → [img] → As System → ● → Select item → ● → Specify display area → ●</li> <li>● Some images may be usable without specifying display area.</li> </ul>

Pasting to message text	<ul style="list-style-type: none"> <li>[Start Here] ● → Tools → ● → Doc./Rec. → Barcode/Scan → ● → Scan Barcode → ● → Frame barcode in center of Display → ● → [img] → Send Message → ● → See below</li> </ul>
	<p><b>All Text</b></p> <ul style="list-style-type: none"> <li>● → S! Mail or SMS → ● → Complete message → [v]</li> <li>● S! Mail Composition window opens automatically depending on character count.</li> </ul>
	<p><b>Selected Text</b></p> <ul style="list-style-type: none"> <li>[img] → Select first character → ● → Highlight text range → ● → S! Mail or SMS → ● → Complete message → [v]</li> <li>● S! Mail Composition window opens automatically depending on character count.</li> </ul>
Copying text	<ul style="list-style-type: none"> <li>[Start Here] ● → Tools → ● → Doc./Rec. → Barcode/Scan → ● → Scan Barcode → ● → Frame barcode in center of Display → ● → See below</li> </ul>
	<p><b>Text</b></p> <ul style="list-style-type: none"> <li>[img] → Copy → ● → Select first character → ● → Highlight text range → ●</li> </ul> <p><b>Number, Address or URL</b></p> <ul style="list-style-type: none"> <li>Select number, mail address or URL → [img] → Copy Telephone, Copy Address or Copy URL → ●</li> </ul>

## Scan Card

Saving to Notepad	<ul style="list-style-type: none"> <li>• <b>Tools</b> → <b>Doc./Rec.</b> → <b>Barcode/Scan</b> → <b>Scan Card</b> → Frame card in center of Display → <b>Notepad</b></li> </ul>
Pasting to message text	<p><b>All Text</b></p> <ul style="list-style-type: none"> <li>• <b>S! Mail or SMS</b> → <b>Complete message</b></li> <li>• S! Mail Composition window opens automatically depending on character count.</li> </ul> <p><b>Selected Text</b></p> <ul style="list-style-type: none"> <li>• <b>Select first character</b> → <b>Highlight text range</b> → <b>S! Mail or SMS</b> → <b>Complete message</b></li> <li>• S! Mail Composition window opens automatically depending on character count.</li> </ul>
Copying text	<p><b>Text</b></p> <ul style="list-style-type: none"> <li>• <b>Copy</b> → <b>Select first character</b> → <b>Highlight text range</b></li> </ul>

## Scan Text

Scanning during text entry	<ul style="list-style-type: none"> <li>In a text entry window, <b>Scan</b> → <b>Text Scanner</b> → Frame text in center of Display → <b>Select line</b></li> </ul>
Scanning more text	<ul style="list-style-type: none"> <li>• <b>Tools</b> → <b>Doc./Rec.</b> → <b>Barcode/Scan</b> → <b>Scan Text</b> → Frame text in center of Display → <b>Select line</b> → <b>Continue Part or Scan More</b></li> <li>• Select <b>Continue Part</b> to enter additional text or <b>Scan More</b> to enter text after a line break.</li> </ul>
Saving scan results	<ul style="list-style-type: none"> <li>• <b>Tools</b> → <b>Doc./Rec.</b> → <b>Barcode/Scan</b> → <b>Scan Text</b> → Frame text in center of Display → <b>Select line</b> → <b>Save</b></li> </ul>
Saving linked info to Phone Book	<ul style="list-style-type: none"> <li>• <b>Tools</b> → <b>Doc./Rec.</b> → <b>Barcode/Scan</b> → <b>Scan Text</b> → Frame text in center of Display → <b>Select line</b> → <b>Select number or mail address</b> → <b>Save to Ph.Book</b> → <b>As New Entry</b> → <b>Complete other fields</b></li> <li>• To add to an existing entry, select <b>As New Detail</b>.</li> </ul>
Saving to Notepad	<ul style="list-style-type: none"> <li>• <b>Tools</b> → <b>Doc./Rec.</b> → <b>Barcode/Scan</b> → <b>Scan Text</b> → Frame text in center of Display → <b>Select line</b> → <b>Notepad</b></li> </ul>
Opening saved scan results	<ul style="list-style-type: none"> <li>• <b>Tools</b> → <b>Doc./Rec.</b> → <b>Barcode/Scan</b> → <b>Scanned Results</b> → <b>Select file</b></li> <li>• Select a file and press <b>Enter</b> to rename files, open properties or delete files.</li> <li>• Some files may not open.</li> </ul>



Using linked info	<p>[Start Here] → Tools → Doc./Rec. → Barcode/Scan → Scan Text → Frame text in center of Display → Select line → See below</p> <p><b>Dialing Numbers</b> Select phone number →</p> <p><b>Sending Messages</b> Select mail address → Complete message →</p> <p><b>Accessing Internet Sites</b> Select URL →</p>
	<p>[Start Here] → Tools → Doc./Rec. → Barcode/Scan → Scan Text → Frame text in center of Display → Select line → Send Message → See below</p> <p><b>All Text</b> → S! Mail or SMS → Complete message →</p> <ul style="list-style-type: none"> <li>S! Mail Composition window opens automatically depending on character count.</li> </ul> <p><b>Selected Text</b> → Select first character → Highlight text range → S! Mail or SMS → Complete message →</p> <ul style="list-style-type: none"> <li>S! Mail Composition window opens automatically depending on character count.</li> </ul>


Copying text	<p>[Start Here] → Tools → Doc./Rec. → Barcode/Scan → Scan Text → Frame text in center of Display → Select line → See below</p> <p><b>Text</b> → Copy → Select first character → Highlight text range →</p> <p><b>Number, Address or URL</b> Select number, mail address or URL → Copy Telephone, Copy Address or Copy URL →</p>

## Osaifu-Keitai®

### ? Cannot use Osaifu-Keitai® (S! FeliCa)

- Battery may be low. Charge battery or install a charged battery.

### ? Recognition via reader/writer takes time

- Check  logo area. Foreign articles can block/hamper recognition.

### ? Call Remote Lock does not activate even after specified number of Missed Calls

- Missed Call count is reset by calls from other numbers. If series is interrupted, start over from the beginning.
- When Call Forwarding is active, Missed Calls may not be recorded.

## Wakeup TV

### ? TV does not activate with specified channel

- If Wakeup TV Time arrives while TV is active, channel does not switch to the specified one.

## Voice Recorder

### ? Cannot record properly

- If incompatible microphone is connected, recording may fail.

### ? Noise/skipping occurs

- Avoid shocks to handset while recording; may cause noise or skipping.

### ? Recording takes time to start

- Recording window may take longer to open as more Voice files are saved on Memory Card.

## Scanning Barcode/Card/Text

### ? Cannot read barcodes properly

- Scan may fail if barcode is dirty or unclear.
- Scan may fail if barcode is scanned under inadequate light.
- Scan may fail if multiple barcodes are captured at one time.

### ? Cannot read barcodes during text entry

- Scanning is not available during calls or when mobile camera is active.

### ? Cannot read barcode images in Data Folder automatically

- When scan fails, follow onscreen instructions and select next barcode image manually.

### ? Cannot scan business cards properly

- Scan fails if business card is printed in light-colored text on a dark background, handwritten or printed in casual/decorative fonts, decorated with a background pattern, or designed with both vertical and horizontal text.
- Scan may fail if business card is printed in light-colored text on a light background, printed in italics or extremely small fonts, decorated with a logo or logo-like text, printed on a glossy paper or other material, or dirty/folded.

### ? Cannot scan text properly

- Scanning over 35 characters at one time may yield poor results.
- Adjust to frame text in [ ]. Letters at the ends may be distorted.